Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

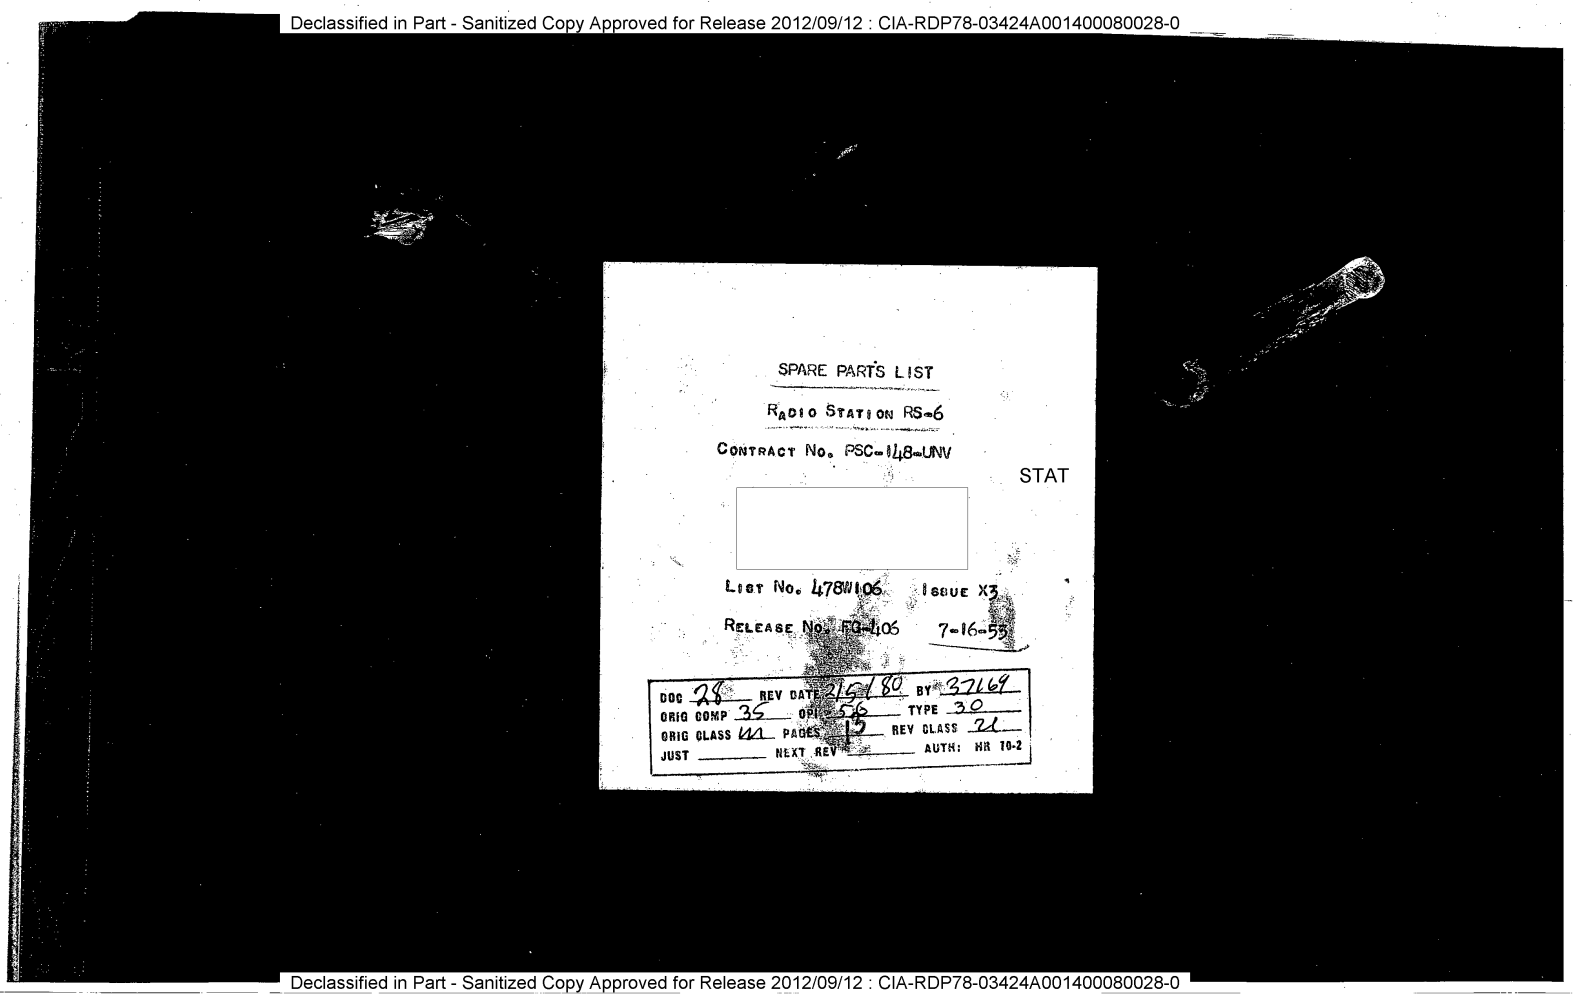

SPARE PARTS LIST

RADIO STATION RS-6

CONTRACT No. PSC-148-UNV

STAT

LIST No. 478W106 ISSUE X3

RELEASE No. FG-106 7-16-59

DOC 28 REV DATE 2/6/80 BY 37169
ORIG COMP 35 OPT 56 TYPE 30
ORIG CLASS U PAGES 15 REV CLASS 22
JUST _____ NEXT REV _____ AUTH: HR 70-2

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

PARTS LIST No. 478W106 RADIO STATION RS-6 ISSUE X3.

PAGE	ITEM No.	REMARKS
1	11	DELETED
1	11.1	ADDED ITEM NO. 11.1 AS REPLACEMENT FOR ITEMS NO. 11;
2	22	DELETED
2	22.1	ADDED ITEM NO. 22.1 AS REPLACEMENT FOR ITEM NO. 22;
3	30	DELETED
3	30.1	ADDED ITEM NO. 30.1 AS REPLACEMENT FOR ITEM NO. 30;
4	47	R-18 DELETED, SPARES PER KIT REDUCED TO 1.
4	47.1	ADDED ITEM NO. 47.1.
5	61	T-10 DELETED, SPARES PER KIT REDUCED TO 3.
5	61.1	ADDED ITEM 61.1;
5	63	DELETED
5	63.1	ADDED ITEM 63.1 AS REPLACEMENT FOR ITEM NO. 63;
5	64	CORRECTED PART NO. FORM 448A103 TO 448B103
6	65	DELETED
6	66	DELETED
6	66.1	ADDED ITEM 66.1 AS REPLACEMENT FOR ITEM NO. 66;
6	68	DELETED
6	68.1	ADDED ITEM 68.1 AS REPLACEMENT FOR ITEM NO. 68;
6	73.1	ADDED ITEM 73.1;
6	73.2	ADDED ITEM 73.2;
7	92	DELETED
9	119	DELETED
9	119.1	ADDED ITEM 119.1 AS REPLACEMENT FOR ITEM NO. 119;
9	120.1	ADDED ITEM 120.1
11	134	CHANGED PART NO. FROM 418K128 TO 417K128; CORRECTED PRICE;
11	135	CHANGED PART NO. FROM 418A127 TO 417A127; CORRECTED PRICE;

CEN-7-20-53

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

RADIO STATION RS-6
CONTRACT NO. PSC-148-UNV
RECEIVER MODEL #RR-6

LIST No. 478W106
RELEASE No. FG-406
ISSUE X-3 DATED 7-16-53

ITEM No.	REF SYM No.	NOMENCLATURE	PART No.	JAN PART No.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE	STAT
1	C-1 C-46	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE 47 MMF ±10%; 500 VDCW	921R121	CC30SL470K	2	0.078	0.16	
2	C-2	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 22 MMF ±10%; 500 VDCW	921R107	CC20SL220K	1	0.081	0.08	
3	C-3	CAPACITOR, FIXED, CERAMIC DIELECTRIC: DISC TYPE; .001 MF; 500 VDCW	921R142		1	0.070	0.07	
4	C-7	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 27 MMF ±10%; 500 VDCW	921R109	CC20SL270K	1	0.081	0.08	
5	C-8	CAPACITOR, FIXED, CERAMIC DIELECTRIC: 15 MMF ±10%; 500 VDCW	921R104	CC20SL150K	1	0.048	0.05	
6	C-9A, B, C	CAPACITOR, VARIABLE, AIR DIELECTRIC: PLATE MESHING TYPE; 3 SECTIONS; A & C-10 TO 186 MMF; B-14 TO 190 MMF; INCLUDES WORMDRIVE	419D101		1	11.988	11.99	
7	C10,C17,C11 C29,C16,C26	CAPACITOR, VARIABLE, AIR DIELECTRIC: PLATE MESHING TYPE; 1.7 TO 8.7 MMF	419A103		6	0.774	4.64	
8	C-12,C-14, C-15,C-22, C-31,C-32, C-33,C-34, C-35,C-36, C-37,C-41, C-43,C-44, C-45,C-52,C-53	CAPACITOR, FIXED, CERAMIC DIELECTRIC: DISC TYPE .01 MMF -20%+80% 450vDCW	921R152		17	0.077	1.31	
9	C-30	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 100 MMF ±5% N220	921R127	CC30SL101K	1	0.076	0.08	
10	C-18	CAPACITOR, FIXED, MICA DIELECTRIC: 2000 MMF±5% 300 VDCW	921R328	CM20D202J	1	0.316	0.32	
11.1	C-19,C-21	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE 7.0 MMF ±0.25 MMF; 500 VDCW	421A143		2	0.247	0.49	
12	C-20	CAPACITOR, FIXED, MICA DIELECTRIC: 1000 MMF±5%;500VDCW	921R705		1	0.146	0.15	

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

ITEM No.	REF SYM No.	NOMENCLATURE	PART NO.	JAN PART NO.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE
13	C-23	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 2 MMF ±0.25 MMF; 500 VDCW	92IR463	CC20CJ020C	1	0.224	0.22
14	C-24	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 1 MMF ±0.25 MMF; 500 VDCW	92IR621	CC20CH010C	1	0.196	0.20
15	C-25	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 10 MMF ±10%; 500 VDCW	92IR101	CC20SL100K	1	0.078	0.08
16	C-27	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 8.2 MMF ±0.25 MMF; 500 VDCW	92IR622		1	0.219	0.22
17	C-39	CAPACITOR, FIXED, CERAMIC DIELECTRIC: DISC TYPE; .001 MF 500 VDCW	92IR142		1	0.070	0.07
18	C-40,C-13	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 56 MMF ±10%; 500 VDCW	92IR123	CC30SL560K	2	0.067	0.14
19	C-47	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 100 MMF ±10%; 500 VDCW	92IR127	CC30SL101K	1	0.076	0.08
20	C-48	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 33 MMF ±10%; 500 VDCW	92IR110	CC20SL330K	1	0.081	0.08
21	C-49	CAPACITOR, VARIABLE, AIR DIELECTRIC: PLATE MESHING TYPE; 1.7 TO 8.7 MMF; SPECIAL SHORTING TYPE	419B102		1	0.882	0.88
22.1	C-50	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 100 MMF 10%; 500 VDCW	92IR884		1	0.108	0.11
23	C-51	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 27 MMF ±10%; 500 VDCW	92IR109	CC20SL270K	1	0.081	0.08
24	CR-1	CRYSTAL UNIT, RECTIFYING: GERMANIUM TYPE; G.E. TYPE 1N48 OR	448B104 OR		1	0.588	0.59

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

ITEM No.	REF SYM No.	NOMENCLATURE	PART No.	JAN PART No.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE	STAT
25		CRYSTAL UNIT, RECTIFYING: GERMANIUM TYPE; KEMTRON TYPE 1N34 OR	448K105 OR		1	-	-	
26		CRYSTAL UNIT, RECTIFYING: GERMANIUM TYPE; SYLVANIA TYPE 1N34	448K106		1	-	-	
27	I-1	DIAL, BFO CONTROL	436B102		1	0.088	0.09	
28	I-2	DIAL, TUNING	434D101		1	1.400	1.40	
29	I-3	INDICATOR, FREQUENCY CHANNEL: WITH RED & BLUE WINDOWS & RACK GEAR	401V757		1	0.482	0.48	
30.1	I-4	KNOB ASSEMBLY, ADJUST CALIBRATION: WITH ADJUSTMENT SCREW	401V756		1	0.149	0.15	
31	I-5	KNOB, RANGE SWITCH	438B101		1	0.183	0.18	
32	I-6	KNOB ASSEMBLY, VERNIER: COMPLETE WITH BRACKETS, BUSHINGS, TENSION SPRING	401V752		1	1.253	1.25	
33	J-1	CONNECTOR, 2-PIN (ANTENNA & GROUND)	409C153		1	0.458	0.46	
34	J-2	CONNECTOR, 2-PIN (PHONES)	409K154		1	0.470	0.47	
35	L-1	COIL, RADIO FREQUENCY CHOKE: 220 UH	424K138		1	0.362	0.36	
36	L-2	COIL, RADIO FREQUENCY: 945 UH; TAPPED; ADJUSTABLE IRON CORE; BEAT FREQUENCY OSCILLATOR	424B164		1	0.725	0.73	
37	PL-6	CONNECTOR, PLUG: 4 MALE CONTACTS; PLUG ONLY	428B132		1	0.875	0.88	
38		CONNECTOR ASSEMBLY, PLUG: 4 MALE CONTACTS; WITH CABLE	401B518		2	1.312	2.62	
39	R-1, R-14, R-15, R-19, R-20, R-23, R-25	RESISTOR, FIXED, COMPOSITION: 56,000 OHMS ±10%; 1/2W; 1NS	906R526		7	0.020	0.14	

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

SPARE PARTS LIST
RADIO STATION RS-6
CONTRACT NO. PSC-148-UNV
RECEIVER MODEL #RR-6

LIST NO. 478W106
RELEASE NO. FG-406
ISSUE X-3 DATED 7-16-53

ITEM NO.	REF SYM NO.	NOMENCLATURE	PART NO.	JAN PART NO.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE	STAT
40	R-2	RESISTOR, FIXED, COMPOSITION: 680 OHMS ±10%; 1/2W; INS	906R445	RC20BF681K	1	0.020	0.02	
41	R-3,R-12 R-17,R-33	RESISTOR, FIXED, COMPOSITION: 470,000 OHMS ±20%; 1/2W; INS	906R565	RC20BF474M	4	0.016	0.06	
42	R-4,R-8, R-16,R-21, R-29	RESISTOR, FIXED, COMPOSITION: 6800 OHMS ±20%; 1/2W; INS	906R488	RC20BF682M	5	0.016	0.08	
43	R-5,R-11, R-32	RESISTOR, FIXED, COMPOSITION: 10,000 OHMS ±20%; ½W; INS	906R495	RC20BF103M	3	0.016	0.05	
44	R-6	RESISTOR, FIXED, COMPOSITION: 120 OHMS ±10%; 1/2W; INS	906R414	RC20BF121K	1	0.019	0.02	
45	R-7,R-10	RESISTOR, FIXED, COMPOSITION: 15,000 OHMS ±20%; 1/2W; INS	906R502	RC20BF153M	2	0.016	0.03	
46	R-9	RESISTOR, FIXED, COMPOSITION: 3.3 MEGOHMS ±20%; 1/2W; INS	906R600	RC20BF335M	1	0.021	0.02	
47	R-13,	RESISTOR, FIXED, COMPOSITION: 2700 OHMS ±10%; ½W; INS	906R470	RC20BF272K	1	0.020	0.02	
47.1	R-18	RESISTOR, FIXED, COMPOSITION: 2200 OHMS ±10%; ½W; INS	906R466	RC20GF222K	1	0.025	0.03	
48	R-26,R-30	RESISTOR, FIXED, COMPOSITION: 270,000 OHMS ±10%; 1/2W; INS	906R554	RC20BF274K	2	0.020	0.04	
49	R-27	RESISTOR, FIXED, COMPOSITION: 330 OHMS ±10%; 1/2W; INS	906R431	RC20BF331K	1	0.020	0.02	
50	R-28	RESISTOR, VARIABLE: COMPOSITION: 1 MEGOHM ±20%+ 1/10W; INCLUDES KNOB	4188105		1	0.478	0.48	
51	R-31	RESISTOR, FIXED, COMPOSITION: 100,000 OHMS ±20%; 1/2W; INS	906R537	RC20BF104M	1	0.016	0.02	

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

ITEM No.	REF SYM No.	NOMENCLATURE	PART No.	JAN PART No.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE	STAT
52	R-34	RESISTOR, FIXED, COMPOSITION: 120,000 OHMS ±10% 1/2W; INS	906R540	RC20BF124K	1	0.020	0.02	
53	S-1	SWITCH, SLIDE: RANGE SWITCH; WITH KNOB	440C102		1	0.731	0.73	
54	S-2	SWITCH, PUSH: SINGLE-POLE, SINGLE-THROW; MOMENTARY CONTACT; NORMALLY OPEN	440A103		1	1.058	1.06	
55	T-1	TRANSFORMER, RADIO FREQUENCY: ADJUSTABLE IRON CORE; LF ANTENNA	424B162		1	1.158	1.16	
56	T-2	TRANSFORMER, RADIO FREQUENCY: ADJUSTABLE IRON CORE; HF ANTENNA	424B163		1	1.213	1.21	
57	T-3	TRANSFORMER, RADIO FREQUENCY: ADJUSTABLE IRON CORE; LF RF	424B158		1	1.287	1.29	
58	T-4	TRANSFORMER, RADIO FREQUENCY: ADJUSTABLE IRON CORE; HF RF	424B159		1	1.280	1.28	
59	T-5	TRANSFORMER, RADIO FREQUENCY: ADJUSTABLE IRON CORE; LF Osc	424B160		1	1.201	1.20	
60	T-6	TRANSFORMER, RADIO FREQUENCY: ADJUSTABLE IRON CORE; HF Osc	424B161		1	1.218	1.22	
61	T-7, T-8, T-9	TRANSFORMER, INTERMEDIATE FREQUENCY: 455KC; INPUT; IRON CORE; DOUBLE-TUNED; WITH SHIELD	424K180		3	0.627	1.88	
61.1	T-10	TRANSFORMER; OUTPUT	425B121		1	1.83	1.83	
62	V-1, V-2, V-3, V-4, V-5	ELECTRON TUBE: SUBMINIATURE PENTODE; 8 TERM WIRE TYPE		5899	5	10.775*	53.88*	
62.1	V-6, V-7, V-8	ELECTRON TUBE: SUBMINIATURE TRIODE,		5718	3	7.779*	23.33*	
63.1	X-1	SOCKET, CRYSTAL: WITH SWITCH	409B176		1	2.480	2.48	
64	Y-2	CRYSTAL UNIT, QUARTZ: 500 KC	448B103		1	10.499	10.50	

* FEDERAL EXCISE TAX INCLUDED

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

ITEM NO.	REF SYM NO.	NOMENCLATURE	PART NO.	JAN PART NO.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE
66.1	C-102	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 47 MMF ±10%; 500 VDCW	921R121	CC30SL470K	1	0.081	0.08
67	C-103,C-114	CAPACITOR, FIXED, CERAMIC DIELECTRIC: DISC TYPE; .001 MF; 500 VDCW	921R142		2	0.070	0.14
68.1	C-104	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 56 MMF ±10%; 500 VDCW	921R123	CC30SL560K	1	0.081	0.08
69	C-105	CAPACITOR, VARIABLE, AIR DIELECTRIC: PLATE MESHING TYPE; 7.5 MMF TO 176 MMF	419B121		1	1.620	1.62
70	C-106,C-108, C-109,C-110, C-111,C-115	CAPACITOR, FIXED, CERAMIC DIELECTRIC: DISC TYPE; .01 MMF-20+80%; 450 VDCW	921R152		6	0.077	0.46
71	C-107	CAPACITOR, FIXED, CERAMIC DIELECTRIC: TUBULAR TYPE; 22 MMF ±10%; 500 VDCW	921R107	CC20SL220K	1	0.081	0.08
72	C-112	CAPACITOR, VARIABLE, AIR DIELECTRIC: PLATE MESHING TYPE; 11 MMF TO 218 MMF	419B104		1	2.168	2.17
73	C-116	CAPACITOR, FIXED, ELECTROLYTIC: 5 MF; 150 VDCW	423A104		1	0.260	0.26
73.1	C-118	CAPACITOR, FIXED, MICA DIELECTRIC: 240 MMF ±5%; 500 VDCW	921R227	CM20B241J	1	0.096	0.10
73.2	C-119	CAPACITOR, FIXED, CERAMIC DIELECTRIC: 1 MMF ±0.25 MMF; 500 VDCW	921R621	CC20CK010C	1	0.268	0.27
74	E-101,E-102,	LAMP, GLOW: NEON; 1/4W (BLUE)	465K114		20	0.062	1.24
74.1	E-104	LAMP, GLOW: NEON; 1/4 (YELLOW)	465K116		10	0.062	0.62
75	E-103	LAMP, INCANDESCENT, G.E. TYPE 49: 2V; .06 AMP; TUBULAR; CLEAR GLASS; BAYONET BASE	465A113		10	0.067	0.67
76	I-101	KNOB, ANT IMPEDANCE MATCHING SWITCH	436B125		1	0.037	0.04
77	I-102	KNOB, FINAL AMP TUNING	436B156		1	0.078	0.08

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

ITEM No.	REF SYM No.	NOMENCLATURE	PART No.	JAN PART No.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE
78	I-103	KNOB, OSC TUNING	436B127		1	0.062	0.06
79	J-101	JACK, TELEPHONE, THREE CIRCUIT: ACCOMMODATES 2-CONDUCTOR ARMY PLUG PL-55	409A158		1	0.438	0.44
80	J-102	CONNECTOR, 2-PIN (ANTENNA & GROUND)	409K154		1	0.470	0.47
81	J-103	CONNECTOR, 2-PIN (REC ANT & MONITOR)	409C153		1	0.458	0.46
82	K-101	RELAY, KEYING, DPDT: SWITCHES ANTENNA AND B POWER	459C112		1	3.460	3.46
83	L-101	COIL, RADIO FREQUENCY: PLATE TANK; 16.4 UH	424A128		1	0.248	0.25
84	L-102	COIL, RADIO FREQUENCY CHOKE	424A143		1	0.076	0.08
85	L-103	COIL, RADIO FREQUENCY CHOKE: 100 UH	424A155		1	0.366	0.37
86	L-104	COIL, RADIO FREQUENCY: HF PLATE TANK; 5 TAPS	424B204		1	0.923	0.92
87	L-105	COIL, RADIO FREQUENCY: LF PLATE TANK; 5 TAPS	424B202		1	1.189	1.19
88	L-106	COIL, RADIO FREQUENCY CHOKE: 100 UH	424A201		1	0.321	0.32
89	LR-101	COIL, RADIO FREQUENCY: 80 UH; WOUND ON 560 OHM ±10% 1/2W FIXED COMPOSITION RESISTOR	424A156		1	0.312	0.31
90		CONNECTOR ASSEM., PLUG & CABLE: 6 MALE CONTACTS	401B707		2	2.~~568~~ .574	5.14
91	R-101	RESISTOR, FIXED, COMPOSITION: 100,000 OHMS ±10%; 1/2W; INS	905R536	RC20BF104K	1	0.020	0.02
93	R-104	RESISTOR, FIXED, COMPOSITION: 180,000 OHMS ±10%; 1/2W; INS	906R547	RC20BF184K	1	0.020	0.02
94	R-105	RESISTOR, FIXED, COMPOSITION: 33,000 OHMS ±10%; 1W; INS	906R781	RC30BF333K	1	0.030	0.03

STAT

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

STAT

ITEM NO.	REF SYM NO.	NOMENCLATURE	PART NO.	JAN PART NO.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE
95	R-106	RESISTOR, FIXED, COMPOSITION: 1.5 MEGOHMS ±10%; 1/2W; INS	906R585	RC20BF155K	1	0.020	0.02
96	R-107	RESISTOR, FIXED, COMPOSITION: 27,000 OHMS ±10%; 1W; INS	906R778	RC30BF273K	1	0.030	0.03
97	R-108	RESISTOR, FIXED, COMPOSITION: 270 OHMS ±10%; 2W; INS	906R960	RC42BE271K	1	0.067	0.07
98	R-109	RESISTOR, FIXED, COMPOSITION: 27,000 OHMS ±10%; 2W; INS	906R1044	RC42BE273K	1	0.061	0.06
99	R-110	RESISTOR, FIXED, COMPOSITION: 12 OHMS ±10%; 1/2W; INS	906R372	RC20BF120K	1	0.020	0.02
100	R-111	RESISTOR, FIXED, COMPOSITION: 10 MEGOHMS ±10%; 1/2W; INS	906R620	RC20BF106K	1	0.020	0.02
101	R-112	RESISTOR, FIXED, COMPOSITION: 1,200 OHMS ±10%; 2W; INS	906R988	RC42BE122K	1	0.062	0.06
102	S-101	SWITCH, SLIDE: SINGLE-POLE, DOUBLE THROW	440A123		1	0.089	0.09
103	S-102	SWITCH, SLIDE: DOUBLE-POLE, DOUBLE-THROW	440A122		1	0.105	0.11
104	S-103	SWITCH, ROTARY: SPECIAL; 5-POSITION WITH OFF; 2 POLE	440B104		1	2.455	2.46
105	S-104	KEY ASSEMBLY, TRANSMITTER	401V724		1	0.757	0.76
106	V-101	ELECTRON TUBE: MINIATURE PENTODE; 7-PINS;		6AG5	1	0.833*	0.83*
107	V-102	ELECTRON TUBE: PENTODE; OCTAL; PIN TYPE;		2E26	1	3.342	3.34
108	X-101	SOCKET, CRYSTAL	409A131		1	0.111	0.11
101.1	R-113	RESISTOR, FIXED, COMPOSITION: 1 MEGOHM ±10%; ½W; INS	906R578	RC20BF105K	1	0.020	0.02

*FEDERAL EXCISE TAX INCLUDED

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

SPARE PARTS LIST
RADIO STATION RS-6
CONTRACT NO.PSC-148-UNV
POWER SUPPLY RP-6

LIST No. 47RW106
RELEASE No. FG-406
ISSUE X-3 DATED 7-16-53

ITEM No.	REF SYM No.	NOMENCLATURE	PART No.	JAN PART No.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE	STAT
109	C-201,C-202	CAPACITOR, FIXED, PAPER DIELECTRIC: .006 MF 1600 VDCW	408A123		2	0.219	0.44	
110	C-203	CAPACITOR, FIXED, PAPER DIELECTRIC: 5 MF 200 VDCW	408A121		1	0.831	0.83	
111	C-204	CAPACITOR, FIXED, CERAMIC DIELECTRIC: DISC TYPE; .01 MF-20%+80%; 450 VDCW	921R152		1	0.077	0.08	
112	C-205	CAPACITOR, FIXED, CERAMIC DIELECTRIC: DISC TYPE; .5 MF; -20%+80%; 200 VDCW OR: .5 MF:-20%+80%: 100 VDCW	408K107 408K108		1	0.759	0.76	
114	CR-201	RECTIFIER, METALLIC: SELENIUM, FULL-WAVE	448C123		1	5.877	5.88	
115	E-201	LAMP, GLOW: NEON; 1/4W (RED)	465K115		10	0.062	0.62	
116	F-201	FUSE, GLASS TUBULAR: 1.5 AMPERE, 250V	465A111		10	0.070	0.70	
117	F-202	FISE, GLASS TUBULAR: 15 AMPERE, 32V	465K112		10	0.027	0.27	
118	G-201	VIBRATOR, NON-SYNCHRONOUS: 115CPS, 6 VDC	448B101		1	2.266	2.27	
119.1	I-201	KNOB, LINE VOLTAGE SELECTOR: PERMANENTLY GLUED TO SHAFT OF S-201	436B121		1	0.059	0.06	
120	L-201	COIL, RADIO FREQUENCY CHOKE: 6.0 UH	424A157		1	0.228	0.23	
120.1	L-202	COIL, RADIO FREQUENCY CHOKE: 0.25 UH	424A193		1	0.214	0.21	
121	R-201,R-202	RESISTOR, FIXED, COMPOSITION: 100,000 OHMS ±5%; 1/2W; INS	906R535	RC20BF104J	2	0.039	0.08	
122	R-203,R-204	RESISTOR, FIXED, COMPOSITION: 56 OHMS ±10%; 1/2W; INS	906R400	RC20BF560K	2	0.020	0.04	
R-123	S-201	SWITCH, ROTARY: 8-POSITION; SINGLE-POLE; SHORTING TYPE, KNOB I-201 MUST BE BROKEN TO REMOVE S-201	440B108		1	0.627	0.63	

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

SPARE PARTS LIST
RADIO STATION RS-6
CONTRACT NO. PSC-148-UNV
POWER SUPPLY RP-6

LIST No. 478W106
RELEASE No. FG-406
ISSUE X-3 DATED 7-16-53

ITEM No.	REF SYM No.	NOMENCLATURE	PART No.	JAN PART No.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE
124	S0-1,S0-2	CONNECTOR ASSEMBLY: CONSISTS OF TWO RECEPTACLES, ONE 8-PRONG (S0-1) AND ONE 7-PRONG (S0-2)	409B121		2	1.079	2.16
125		CONNECTOR,ASSEM.,PLUG & CABLE 6 FEMALE CONTACTS	401K766		2	2.515	5.03
126	T-201	TRANSFORMER, POWER	425D137		1	12.407	12.41
127	V-201	ELECTRON TUBE: MINIATURE DOUBLE DIODE;		6X4	1	0.547*	0.55*

*FEDERAL EXCISE TAX INCLUDED

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

STAT

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

ITEM No.	REF SYM No.	NOMENCLATURE	PART No.	JAN PART No.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE	STAT
128	C-301A,B	CAPACITOR, FIXED, PAPER DIELECTRIC: 2-SECTIONS; 1.5 x 1.5 MF 600 VDCW	408B122		1	1.815	1.82	
129	C-302	CAPACITOR, FIXED, PAPER DIELECTRIC: 5 MF; 600VDCW	408B106		1	2.181	2.18	
130	F-301	SPARE FUSE, GLASS TUBULAR: 1.5 AMPERE, 250 V	465A111		10	0.070	0.70	
131	F-302	SPARE FUSE, GLASS TUBULAR: 15 AMPERE, 32V	465K112		10	0.027	0.27	
132	L-301	REACTOR: FILTER CHOKE; SINGLE WINDING; 4 HY; INCLUDES MTG NUTS	401V375		1	0.709	0.71	
133	PL-3	CONNECTOR, PLUG: 6 MALE CONTACTS	428B133		2	0.966	1.94	
134	R-301,R-303	RESISTOR, FIXED, WIREWOUND: 8000 OHMS ±5%, 10W	417K128		2	0.283	0.47	
135	R-302,R-304	RESISTOR, FIXED, WIREWOUND: 4000 OHMS ±5%, 5W	417A127		2	0.242	0.48	
136	R-305	RESISTOR, FIXED, COMPOSITION: 1 MEGOHM ±10%; 1/2W; INS	906R578	RC20BF105K	1	0.020	0.02	
137 OR 138	S-301	SWITCH, TOGGLE: DOUBLE-POLE, DOUBLE THROW; 3 AMP 250V	440A110 OR 440K111		1	0.610	0.61	
139	SO-5	CONNECTOR, PLUG: 6 FEMALE CONTACTS	409B174		2	0.718	1.44	
140	SO-6	CONNECTOR, PLUG: 4 FEMALE CONTACTS	409B160		2	0.686	1.38	
141	V-301,V-302	ELECTRON TUBE: SUB-MINIATURE VOLTAGE REGULATOR;		5644	2	4.897	9.79	
142		ELECTRON TUBE: SUB-MINIATURE VOLTAGE REGULATOR;		5787	1	6.581	6.58	
143	W-301	CABLE ASSEMBLY, AC: 2-CONDUCTOR; WITH UNIVERSAL LINE PLUG & JONES PLUG; 6 FT. LONG	401B363		1	0.563	0.56	
144	W-302	CABLE ASSEMBLY, BATTERY: 2-CONDUCTORS; ONE RED, ONE BLACK; WITH SPADE LUGS & JONES PLUG; 41 IN. LG	401B366		1	1.208	1.21	

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0

RADIO STATION RS-6
CONTRACT NO. PSC-148-UNV
ADDITIONAL ACCESSORIES

LIST NO. 478W106
RELEASE NO. FG-406
ISSUE X-3 DATED 7-16-53

ITEM NO.	REF SYM NO.	NOMENCLATURE	PART NO.	JAN PART NO.	SPARES PER KIT	UNIT PRICE	EXT'D. PRICE
145	E-301	HANK, ANTENNA (100 FT)	451B101		1	0.642	0.64
146	E-302	INSULATOR, ANTENNA	414A117		1	0.157	0.16
147	H-301	CLAMP, BATTERY; WITH SCREW	401V376		1	0.129	0.13
148	HS-301	RECEIVER, EARSET: MAGNETIC TYPE; 2000 OHMS IMPEDANCE; WITH 2-TERMINAL RECEPTACLE	450B101		1	3.252	3.25
149	W-303	CORD, EARSET: 5 FT. LONG; W-CONDUCTOR; WITH TWO 0.083 TIPS AND 2-PRONG MALE PLUG	430B101		1	1.528	1.53
150	W-304	CORD, INTER-UNIT: CONSISTS OF TWO TWISTED LEADS, WITH THREE CORD TIPS AND ONE BATTERY CLIP TO CONNECT SIDETONE AND ANTENNA TO RECEIVER.	430B143		1	0.352	0.35
151	W-305	PLATES, SCHEMATIC (COMPLETE)	464B274		1	1.039	1.04
							235.48
				MAT'L. PRICE PER LIST		235.48	
				PACKING PRICE PER KIT		30.87	
				PARTS LIST PRICE PER KIT		9.19	
				TOTAL OVERALL PRICE PER KIT		275.54	

STAT

Declassified in Part - Sanitized Copy Approved for Release 2012/09/12 : CIA-RDP78-03424A001400080028-0